



All SINGLE-TURN and MULTI-TURN encoders in the range 58 can be combined with one or two GIM 116 incremental encoders (electrical data as for the GIM 900). Apart from the digital signals, this combination can supply an analogue signal dependent on the speed, e.g. 0 - 20 mA = 0 - 1630 rpm. Three different methods of mounting are available :

Mounting with round flange

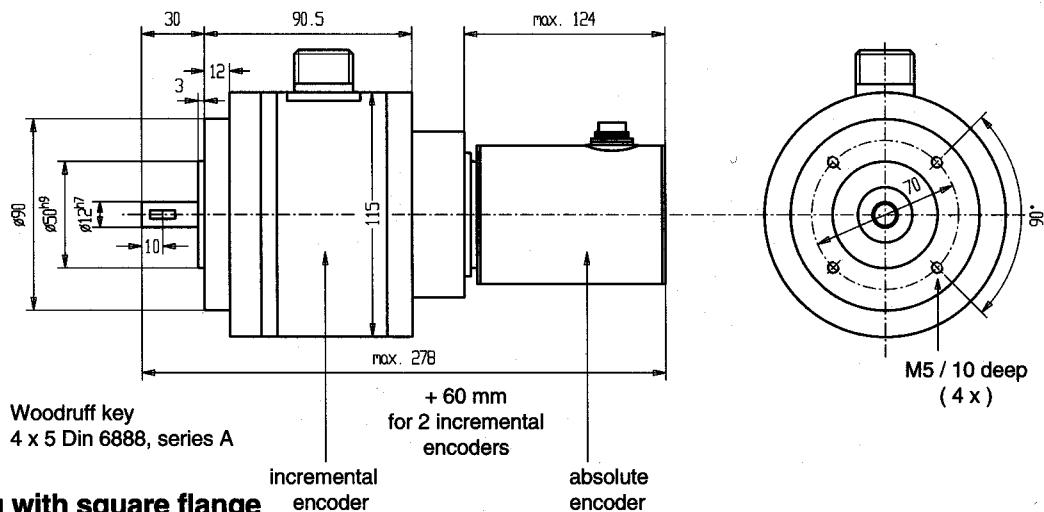

Mounting with square flange

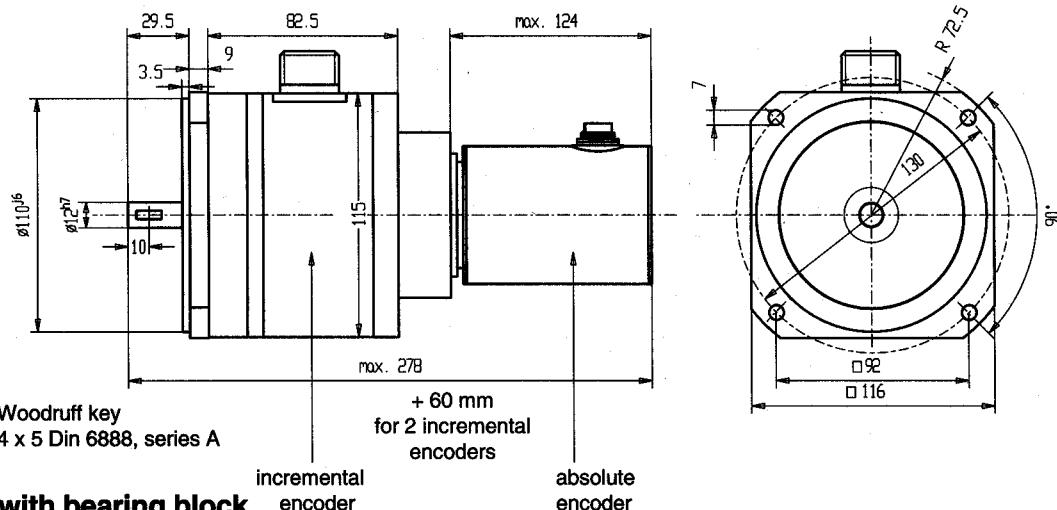

Mounting with bearing block

