

Analog-Schnittstelle 4...20 mA / Analog-Interface 4...20 mA

- Gegenstecker: Binder Serie 423/723
Kontaktanzahl: 3 (Buchse)
- Arbeitstemperaturbereich: -20°C ... +60°C

- Counter plug: Binder series 423/723
Number of contacts: 3 (socket)
- Operating temperature range: -20°C ... +60°C

Kontakt-Nr Pin No	Belegt mit ... / connected to ...	
1	+ $U_B = 21,5 \dots 32$ Volt $I_o < 110$ mA	+ $V_s = 21,5 \dots 32$ VDC $I_o < 110$ mA
2	- $U_B = 0$ Volt	- $V_s = 0$ VDC
3	$I_A = 4 \dots 20$ mA	$I_o = 4 \dots 20$ mA

Lieferform


- Signalverlauf: CW
- Meßbereich: 16 mA auf 105°

CW = Steigender Strom bei Drehung der Welle im Uhrzeigersinn

Programmed values as supplied


- Signal sense: CW
- Measurement range: 16 mA per 105°

Increasing current when turning the shaft clockwise

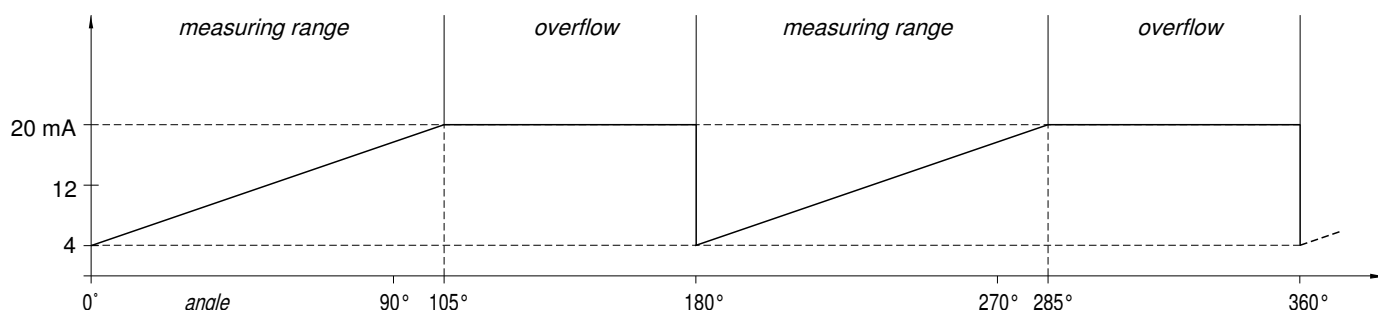

Output

$I_o = 4-20$ mA
 $R_L = 0-0.5$ k



Output KDS specification

Block Diagram

Output

